




AMK1000 ANDROID MICRO KIOSK

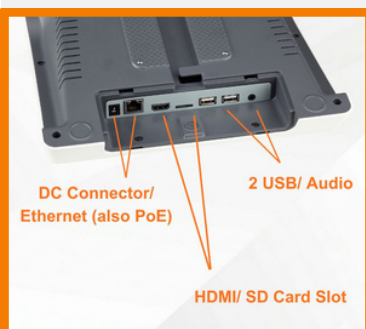

Product Features

- **Hybrid Power Options:** PoE+ and DC support for simplified, flexible wiring.
- **Rich I/O Connectivity:** Versatile USB and LAN ports for printers and peripherals.
- **Android Performance:** Robust Rockchip processor for smooth multitasking and apps.
- **Built-in Data Capture:** Integrated 2D imager and NFC for seamless interaction.
- **Standard VESA Mount:** Compatible with 75x75 brackets for wall or pole installation.

AMK1000 ANDROID MICRO KIOSK



	AMK1000
<u>System Performance</u>	
Processor	Rockchip RK3399
OS	Android 9.x
Memory	LPDDR4 4GB, eMMC - 16GB or 32GB (Default)
Display	10.1”(1280×800) with 5-point PCAP Touch
Network (Wire)	10/100/1000 Mbps Ethernet
Network (Wireless)	Wi-Fi (2.4GHz, 5GHz)/ Bluetooth 5.2
RFID	ISO/IEC 15693, Mifare+, Felica
I/O Port	USB *2, HDMI *1, Audio *1, COM *2 (RJ45 Type), Micro SD *1
Speaker	2W
Camera (Optional)	5MP, Active Array Size: 2593×1944
<u>Data Inputs</u>	
Decoding Capability	<p>1D: JAN/UPC/EAN incl. add on, Codabar/NM-7, Code 11, Code 39, Code 93, Code 128, GS1-128 (EAN-128), GS1 Databar (RSS), IATA, Industrial 2of5, Interleaved 2of5, ISBN-ISSN-ISMN, Matrix 2of5, MSI/Plessey, S-Code, Telepen, Tri-Optic, UK/Plessey, Postal Code: Chinese Post, Intelligent Mail Garcode, Korean Postal Authority Code, POSTENT</p> <p>2D: Aztec Code, Aztec Runes, Chinese Sensible Code, Codablock F, Composite Code, DataMatrix (ECC200), Passport, MRZ (OCR-B), Maxi Code (Mode 2~5), Micro PDF417, Micro QR Code, PDF417, QR Code</p>
<u>Physical</u>	
Dimensions WxLxH	261 × 272 × 72 mm
Power	Adapter 12V 3A PoE+ (Power over Ethernet 802.3at)
Storage Temperature	-40°C ~ 60°C
Working Temperature	0°C ~ 50°C
Relative Humidity	0~95%
<u>Approvals</u>	
Certificate	KC, CE, EAC, FCC, RoHS

